

Demonstration Consideration of Hybrid PDM-OFDM Technique for Free Space Optical Communication System in Anti Weather Situations

Pankaj Chauhan¹, Shailesh Kumar Singh²

¹Student M.Sc, Monad University

²Associate Professor, K.K University Bihar

Abstract - Free Space Optical (FSO) communication is an optical communication technology in which optical data transmitted from one place to another. Some of its main benefit are high security, faster installation, license free spectrum. The presentation of the FSO system is affected by the atmospheric conditions like haze, fog and snow. To reduce the effects of atmospheric disruption Coherent Optical Orthogonal Frequency Division Multiplexing (CO-OFDM) with dual polarization, is proposed. A novel design for FSO communication system is considered. The proposed model is designed by hybridizing PDM and OFDM and its Performance is analyzed under various atmospheric turbulences such as very clear weather, daily weather, and fog and rain weather conditions. The proposed design exhibits an improved performance with SNR values of 55.64dB and 48.27dB at 3km in clear and cloudy skies severally. The number of the system is increased by utilizing dual polarization OFDM technique with 6dB penalty of SNR at 3km. PDM technique is used to boost the capacity and also enhances the spectral efficiency. OFDM modulation reduces the multi-path fading occurred during the FSO transmission. The measured and simulated results confirm the benefits of the proposed design. The proposed system can also work as a reference for the FSO application even in bad atmospheric conditions.

Key Words: Coherent Optical Orthogonal Frequency Division Multiplexing (CO-OFDM), Free Space Optics (FSO) and Polarization Division Multiplexing (PDM)

1. INTRODUCTION

Free Space Optics (FSO) is an Optical communication technology that uses the propagation of light in a free space to convey data between two points. Data rates comparable to optical fiber transmission can be carried by Free Space Optics (FSO) systems with very low error rates, while the extremely narrow laser beam widths ensure that there is almost no practical limit to the number of separate Free Space Optics (FSO) links that can be installed in a given location. The various characteristics of these optical wireless systems also provide better security against wiretapping with the help of point to point communication. The transmission losses are very less compared to base band or RF technologies. Free Space Optics (FSO) is an Optical communication Technology that uses the propagation of light in a free space to transmit data between two points. The

increasing demand for high bandwidth in communication networks is persistent. Free-space optics (FSO) technology makes it possible to obtain the wireless optical communication with high data rate. FSO technology reduces the difficulty while laying optical fibres and has the following advantages: flexible network, better speed than broadband, easy installation, very low initial investment, straight forward deployment system, requires no spectrum license or frequency coordination between users, secure system and no security system upgradation is needed. Its practical applications are terrestrial and outer space communications. Some of its practical application is Outdoor wireless access, Storage Area Network (SAN), Last-mile access, Enterprise connectivity, Fiber backup, Metro-network extensions, Backhaul, Service acceleration, Bridging WAN Access, Point-to-point and point-to-multi purpose communication, Military access. The energy beams are collimated and are sent through clear air or space from the source to the destination, rather than guided through an optical fiber. Collimation can be done with lenses if the energy source does not produce a sufficiently parallel beam to travel the required distance. FSO systems can function over Distances of several kilometres. It is theoretically possible as long as there is a clear line of sight between the source and the destination, communication. Strategically positioned mirrors can be used to reflect the energy, even if there is no direct line of sight. The beams can pass through glass windows with less or no attenuation. FSO systems can be a good solution for some broadband networking needs, there are some demarcation such as physical obstruction, scintillates, geometric losses, absorption, atmospheric turbulence, atmospheric attenuation, scattering. Most significant demerit of this technology is the fact that rain, dust, snow, fog, or smog can block. The transmittance way and shut down the network.

2. PROPOSED METHODOLOGY

The projected system is based on hybridization of PDM and OFDM. Actually atmospheric turbulence is one of the particular condition in FSO systems, which causes amplitude changeable quantity and phase fluctuations during the propagation of optical beam. Under these situations, optical PDM is a promising technology to change the performance.

The basic concept of optical PDM is transmitting the modulated optical signals of the same optical wavelength

independently over orthogonal polarization states. The states of polarization are the steady-going diagnostic of propagating optical signal and are determined by the structure traced out by the transmitted light's electric-field vector in a fixed plane. As distinct modulated optical signal is transmitted through the orthogonal states of Polarization (SOP) of the same light beam so it provides the enhanced transmission capability.

To overcome this difficulty OFDM can be hybridized with PDM which have the ability to beat multi-path channel fading of the signal. OFDM divides wide band signal into individual orthogonal narrow band sub-carriers and transmits it in parallel. Each sub-carrier experiences frequency flat-fading caused by multi-path atmospheric channel, thus in OFDM, there is no inter symbol interference in time domain, and has ability to reduce the effect of fading with lower computational complexity. OFDM technique can also protect the signal from random fading effects which are induced due to atmospheric inclemency.

The block diagram of proposed hybrid PDM/OFDM FSO system is shown in Figure 1 where PDM method will boost the exploiter capability and raise the spectral efficiency and OFDM modulation reduces the multi-path fading take place during the FSO transmission. The proposed system respect of polarization divider that abstracted the optical signal of laser source into its two polarized orthogonal signals. This signal is transmitted later amplification through with atmospheric channel. At the receiver, two orthogonal signals are separated and demodulated.

The hybrid PDM/OFDM FSO optical system description in Figure 1 has been simulated in Opti-system 16.0. Main blocks in this system are Polarization Splitter, OFDM transmitter, RF to Optical Converter, Polarization Combiner, FSO link, Optical to RF converter, OFDM Receiver. It demonstrates a coherent 512-subcarrier 4-QAM OFDM system. On the transmission side, an inverse fast Fourier transform (IFFT) used to accomplish modulation and multiplexing digital in nature. The sub-carrier absolute frequencies are numerical orthogonal over one OFDM symbol period.

CW Laser is used to generate the carrier signal. Two Mach-Zehnder Modulators and a power combiner are used to up-convert the RF data to the optical environment. After converting a signal from Electrical to optical, the optical signals of the two users are joint using a polarization combiner and then it is transmitted through the free space optical connection and becomes degenerate due to fading and weather conditions.

At the receiver end, the optical signal is splitted by a polarization splitter which is used to split the optical signal into two orthogonal polarization states. A coherent receiver with a general oscillator, used to down-convert the data to the RF domain and finally, demodulate and conveyed the resultant signal to the detector.

Coherent receiver consists of a local oscillator, photodiode, optical coupler and a polarization controller. The incoming optical signal and local oscillator are combined in an optical coupler. To match the polarization state between the input optical signal and local oscillator, a polarization controller is used. This polarization controller can be placed either at the local oscillator or at the incoming optical signal.

Table 1 Different attenuation constants for different weather conditions.

WEATHER CONDITIONS	ATTENUATION CONSTANTS
Clear weather	0.5dB/km
Daily weather	5 dB/km
Fog weather	10 dB/km
Rain weather	15 dB/km

In the proposed simulation arrangement, the light source is a CW laser diode with an emission wavelength of around 1550nm and power of 10dBm; a polarization splitter is used to splits the optical signal of laser source into its two polarized orthogonal signals i.e. (in horizontal and vertical states). After combining these two polarization states by polarization combiner, the resultant optical signal is allowed to pass through an FSO channel with attenuation values according to the weather condition in which it has to be operated.

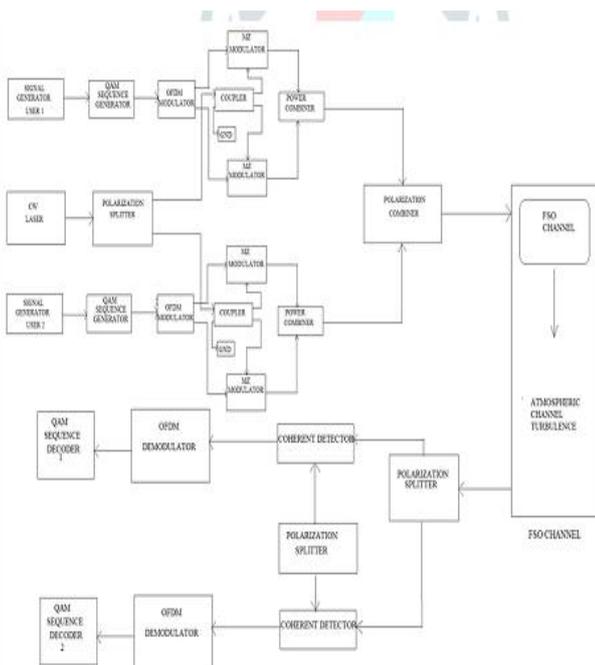


Figure 1. Block diagram of PDM-OFDM FSO system

Different weather conditions are achieved by setting different attenuation constants. For clear visibility, the attenuation value lies somewhere around 0.2–0.5dB, while for Fog the values measured to be 10dB. The Rain being the main disaster has values ranging from 15dB to 35dB. Table 1 shows the corresponding attenuation constants values for different weather conditions.

3. RESULTS AND DISCUSSION

The proposed work is carried out by Optisystem software. The results are shown below.

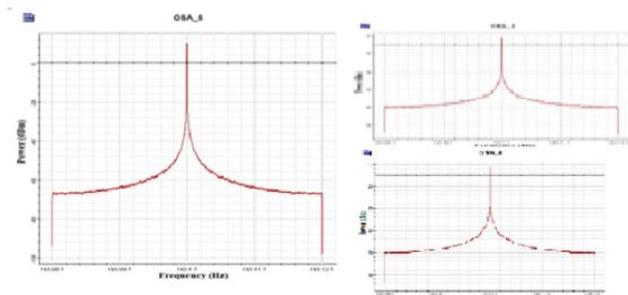


Figure 2 Laser light and orthogonally separated signals

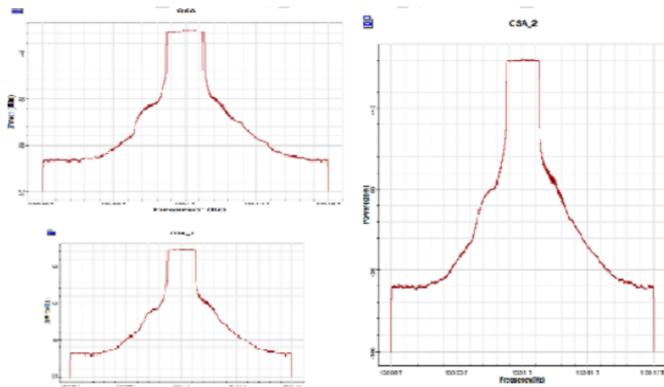


Figure 3 Polarization division multiplexed OFDM signal generation of user 1 and user 2.

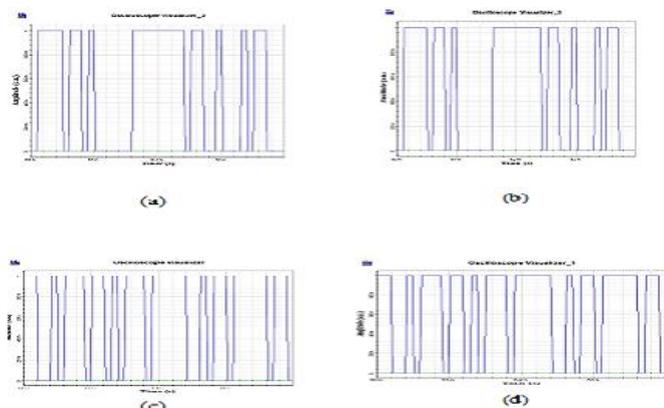


Figure 4 Propagation of Signals in PDM-OFDM FSO system (Visualizer outputs) (a) At transmitter end of user 1 (b) At receiver end of user 1 (c) At transmitter end of user 2 (d) At receiver end of user 2.

The following figures show the constellation plot at various atmospheric conditions for OFDM FSO system. The various atmospheric conditions considered in this work are Very Clear Weather Condition, Daily Weather Condition, Fog Weather Condition and Rain Weather Condition

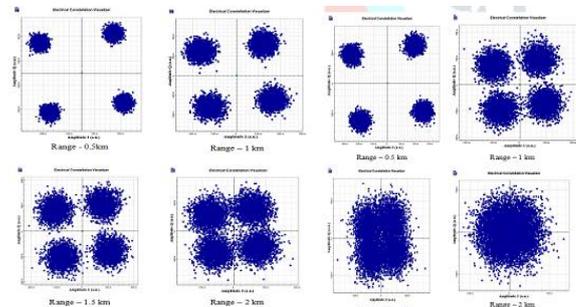


Figure 5 Constellation plot at Very Clear weather condition and daily weather condition (OFDM).

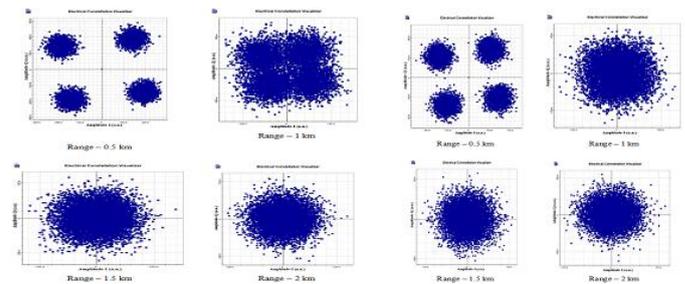


Figure 6 Constellation plot at Fog and Rain weather condition (OFDM).

From the above figures, it is observed that as distances increases, the signal degradation also increases. Fading effect is within acceptable limits till 1km and as the distance increases it becomes dominant. Using OFDM coherent detection in free space optics, we can recover the signals at 0.5 km and 1km. These signals are quite good compared to the higher distances where fading is high.

The following figures show the constellation plot at various atmospheric conditions for PDM-OFDM FSO system.

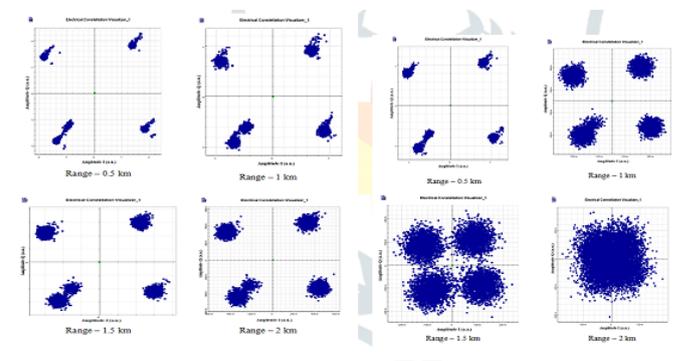


Figure 7 Constellation plot at Very clear and Fog weather condition (PDM-OFDM).

From the above figures, it is observed that the signal degradation increases with distance. Fading effect is within acceptable limits till 1.5km and as the distance increases it becomes dominant. Using PDM -OFDM coherent detection in free space optics, we can recover the signals at 0.5 km, 1 km and 1.5 km. The SNR vs. Range graph for OFDM and the SNR Vs Range graph for hybrid PDM-OFDM FSO systems is shown in figure 8.

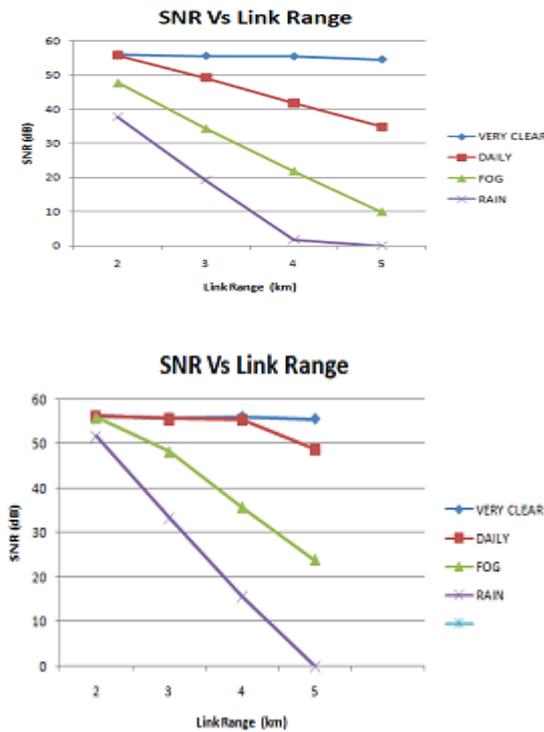


Figure 8 SNR Vs Link Range for OFDM and PDM-OFDM FSO system.

Table 2 SNR values for various link ranges at different weather conditions for OFDM FSO system

LINK RANGE	2 (km)	3 (km)	4 (km)	5 (km)
VERY CLEAR WEATHER CONDITION	56.03 dB	55.59 dB	55.44 dB	54.53 dB
DAILY WEATHER CONDITION	55.76 dB	49.26 dB	41.79 dB	34.87 dB
FOG WEATHER CONDITION	47.76 dB	34.29 dB	21.80 dB	9.87 dB

Table 2 gives the SNR values for various link ranges at different weather conditions for OFDM FSO system.

Table 3 gives the SNR values for various link ranges at different weather conditions for PDM-OFDM FSO system. The SNR values of the proposed system are 55.64dB and 48.27dB at 3km in clear and cloudy skies respectively for PDM-OFDM FSO system whereas it is 49.26dB and 34.29dB at 3km in clear and cloudy skies respectively for OFDM FSO system. This is because the concentration and size of the fog particles are higher as compared to the clear weather but still it shows a good performance for hybrid PDM-OFDM FSO

system. The cardinality of the system is increased by utilizing PDM OFDM technique with 6dB penalty of SNR at 3km.

LINK RANGE	2 (km)	3 (km)	4 (km)	5 (km)
VERY CLEAR WEATHER CONDITION	56.38 dB	56.27 dB	56.12 dB	55.61 dB
DAILY WEATHER CONDITION	56.29 dB	55.64 dB	55.59 dB	48.86 dB
FOG WEATHER CONDITION	56.02 dB	48.27 dB	35.79 dB	23.86 dB
RAIN WEATHER CONDITION	51.75 dB	33.27 dB	15.80 dB	0 dB

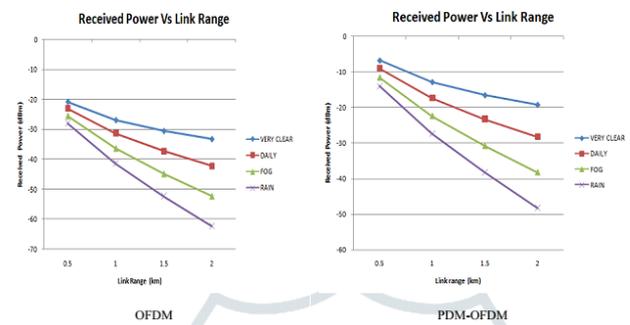


Figure 9 Comparison between OFDM and PDM-OFDM technique for FSO systems in terms of Received Optical Power Vs Range

Table 4 gives the Received power values for various link ranges at different weather conditions for OFDM FSO system. Table 5 gives the Received power values for various link ranges at different weather conditions for PDM-OFDM FSO system.

Table 4 Received power values for various link ranges at different weather conditions for OFDM FSO system.

LINK RANGE	0.5 (km)	1 (km)	1.5 (km)	2 (km)
VERY CLEAR WEATHER CONDITION	-20.75 dBm	-26.88 dBm	-30.51 dBm	-33.21 dBm
DAILY WEATHER CONDITION	-22.99 dBm	-31.30 dBm	-37.28 dBm	-42.22 dBm
FOG WEATHER CONDITION	-25.50 dBm	-36.30 dBm	-44.76 dBm	-52.22 dBm
RAIN WEATHER CONDITION	-27.99 dBm	-41.31 dBm	-52.27 dBm	-62.22 dBm

Table 5 Received power values for various link ranges at different weather conditions for PDM - OFDM FSO system.

LINK RANGE	0.5 (km)	1 (km)	1.5 (km)	2 (km)
VERY CLEAR WEATHER CONDITION	-6.74 dBm	-12.81 dBm	-16.50 dBm	-19.22 dBm
DAILY WEATHER CONDITION	-8.99 dBm	-17.31 dBm	-23.26 dBm	-28.22 dBm

FOG WEATHER CONDITION	-11.49 dBm	-22.30 dBm	-30.76 dBm	-38.20 dBm
RAIN WEATHER CONDITION	-13.98 dBm	-27.30 dBm	-38.26 dBm	-48.22 dBm

4. CONCLUSION

The proposed work instance the simulation design of hybrid PDM/OFDM FSO communication system. The results demonstrate that the polarization section complex and OFDM conjunct can enhance the system quality and shows that the availability of FSO link is reduced that means the concentration and size of the fog particles are higher as compared to the clear weather which corresponds to SNR values of 55.64dB and 48.27dB at 3km in clear and cloudy skies respectively. The cardinality of the system is increased by utilizing dual polarization OFDM technique with 6dB penalty of SNR at 3km. The proposed system can also work as a reference for the FSO application even in bad weather conditions.

REFERENCES

[1] Avneet Kaur, Baljeet Kaur, Kuldeepak Singh, "Design and performance analysis of bidirectional TWDM-PON employing QAM-OFDM for downstream and re-modulation for upstream", *Optik* 134(2017)287-294.

[2] S.Swaminathan, N.R.Raajan, "Optical –Orthogonal Frequency Division Multiplexing –Review", International conference on Power, Control, Signals and Instrumentation Engineering (ICPSCI 2017).

[3] Zhaocheng Wang, Tianqi Mao, Qi Wang, "Optical OFDM for Visible Light Communications", *IEEE* (2017).

[4] Sambhi Srikanth, P.Sriram, Dr. D.Sriram Kumar, "Performance analysis of OFDM employing free space optical communication system", International conference on electronics and communications system (ICECS 2015).

[5] C. Chen, W. Zhong, X. Li, D. Wu, MDPSK based non equalization OFDM for coherent free space optical communication, *IEEE Photon. Technol. Lett* 26 (16) (2014) 1617–1620.

[6] Sushank Chaudhary, Angela Amphawan, "Kashif Nisar, Realization of free space optics with OFDM under atmospheric turbulence", *Optik* 125 (2014) 5196-5198.

[7] V. Sharma, Sushank, High speed CO-OFDM-FSO transmission system, *Optik* 125 (6) (2014) 1761–1763.

[8] Veena Gopinath, Sudhi Sudharman, "Optical OFDM-Superior Technology in wireless communication", International conference on Control, Instrumentation, Communication and Computational Technologies (ICCICCT 2014).

[9] R. Karthikeyan, Dr. R. Prakasam, "OFDM Signal Improvement Using Radio over Fiber for Wireless System," *International Journal of Computer Networks and Wireless Communications*, 2013.

[10] Laxmi Chaudhary, Sudha Yadav, Rohit Mathur, "Next Generation Free Space Optics System in Wireless

Communication Technology", *International Journal of Advances in Electrical and Electronics Engineering*, 2013.

[11] Vishal Sharma, Gurimandeep Kaur, "High speed, long reach OFDM-FSO transmission link incorporating OSSB and OTSB schemes", *Optik* 124 (2013) 6111-6114.

[12] A. Vavoulas, H.G. Sandalidis, D. Varoutas, Weather effects on FSO network connectivity, *J. Opt. Comm. Netw.* 4 (10) (2012) 734–740.

[13] Paulo Diniz, Wallace Martins, Markus Lima, "Block Transceivers: OFDM and Beyond", Morgan and Claypool, *IEEE* (2012).

[14] Sameer Asif, Prashant KR. Yadav, "An Overview to Free Space Optics and its advantages over Fiber optics" *International Journal of Electronics and Communication Engineering*, Vol. 1, Aug. 2012.

[15] Sharma V, Kaur G, "Degradation measures in Free Space Optical communication (FSO) and its mitigation techniques-a review", *International Journal of Computer Applications*, 2012.

[16] Tzi-Dar Chiueh, Pei-Yun Tsai, I-Wei Lai, "Baseband Receiver Design for Wireless MIMO-OFDM Communications", *Wiley-IEEE Press, IEEE* (2012).

[17] Rohling, Hermann, "OFDM Concept for future Communications systems", Springer (2011).