

AN EXPERIMENTAL STUDIES ON BEHAVIOUR OF PERVIOUS CONCRETE BY USING ADDITION OF ADMIXTURES

G.Divya¹, L.Reena²

¹G.Divya, Dept of Civil Engineering, EBET i, Kangeyam, Tamil Nadu, India

²L.Reena, AP/Civil, Dept of Civil Engineering, EBET i, Kangeyam, Tamil Nadu, India

Abstract - Pervious concrete is the high porosity of concrete which is used for flatwork applications and allows the water from precipitation and other source to pass through there by reducing the runoff from a site and recharging ground water levels. The paper shows the additional strength given to the concrete by using admixtures. Concrete materials involve ingredients like cement, coarse aggregate, water, admixtures like fly ash, ground granulated blast furnace slag (GGBS). Coarse aggregate of size 12mm is used. The M53 grade of cement is tested for the process of construction purpose and future use.

Key Words: PERVIOUS CONCRETE, GGBS, FLY ASH

1.1 INTRODUCTION

Pervious concrete is a composite material consisting of coarse aggregate, Portland cement and water. It is different from conventional concrete as the mixture contains no fines in it. The aggregate is usually of a single size and is bonded together by a cement paste. The result is a concrete with a high percentage of interconnected voids that allow the penetration of water through the material matrix. Normal concrete has a void ratio around 3- 5% and pervious concrete has higher void ratios from 18-40% depending on its application. Pervious concrete differs from normal concrete in several other ways. Pervious concrete has lower compressive strength, higher permeability and a lower density. Its compressive strength could be 65% lower than the normal concrete. Pervious concrete is increasingly being installed to improve storm water quality and reduce runoff produced by urban settings. During the last few years, pervious concrete has attracted more and more attention in concrete industry due to the increased awareness of environmental protection.

Many laboratory and field studies have been conducted to investigate into various aspects of pervious concrete. Many studies revealed that unlike conventional concrete, the performance of pervious concrete is highly dependent on both concrete materials and construction techniques. The focus of pervious concrete technology is the balance of permeability and mechanical properties as well as durability.

If the mixture is too wet and easy to compact, the voids will be clogged and the permeability will be compromised. If the mixture is too dry and hard for compaction, the pervious concrete pavement will be weak and vulnerable to various types of distress.

1.1 SCOPE AND OBJECTIVE

In recent times many studies have been carried out on no fines concrete. The objective of the present study is to check the performance of no fines concrete on various percentage of fly ash and GGBS. Concrete is the most important material for construction purposes and cement is the most expensive ingredient in it. The name of no fines concrete itself explains that the fine aggregate has been omitted in this kind of concrete. Due to the absence of fine aggregate in no fines concrete, there is a high percentage of void space which results in high permeability. The unit weight, drying shrinkage and hydrostatic pressure for no fines concrete is less compared to conventional concrete. Due to the less cement content in no fines concrete, the cost of the overall project reduces.

1.2 USES

[1]To construct walls and other structural members.[2] To construct in low-cost buildings.[3] parking lots ,sidewalks and secondary road ,sandwich panel, Drainage layers under reservoir and basement floors Paving and.[4] To reduce the runoff from a site, recharging ground water levels.

1.3 ADVANTAGES AND DISADVANTAGES

Low density, Low cost, Low thermal conductivity, relatively low drying shrinkage, No segregation, better insulating characteristics than conventional concrete because of the presence of large voids. Lack of construction experience, clogging, cold weather problems.

2. LITERATURE REVIEW

Francesca Tittarelli [1] No-fines concretes with compressive strength in the range 7-30 MPa at 28 days of curing were optimized by changing the water-cement ratio from 0.41 to 0.34 and the aggregate-cement ratio from 8 to 4.



Fig. 1 pervious concrete

4.1 Mixing

Mixing shall be done in mechanical mixers only. If we choose drum mixer it is advisable to add some water into the drum before the dry material is added. After that the measured quantity of aggregates and cement shall be introduced in to the drum of mixer while it is revolving. The rest of the water shall be added slowly up to the necessary quantity and wet mixing of the batch shall be continued for minimum one minute till a uniform mix is obtained.

4.2 Compaction

Vibrators shall not be used for compaction of no-fines concrete. No-fines concrete is compacted by rod or gentle ramming. No water shall be added during ramming. Ramming should be done by one or more lines of men arranged across the width of the concrete with a lateral space of not more than 0'5meter. Square rammers shall be used for corners.

4.3 Curing

If curing is inadequate, then no fines cement concrete will lose its water contents resulting in complete dehydration of cement which will cause collapse of concrete. Fresh concrete is highly sensitive to intense sunshine, wind and should be protected by damp sheet covers and by sprinkling with plenty water; sprinkling should not be started too early since it may dust off the cement from the surface. Sprinkling must be maintained for a minimum time of seven days.

5. TESTING OF SPECIMENS

5.1 Compressive Strength

For cubes, compressive strength test was conducted at the curing age of 7, 14 and 28 days as shown in figure 2.

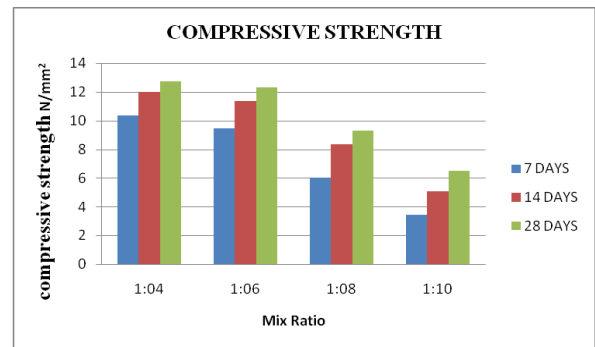


Fig. 2 Compressive strength of pervious concrete

5.2 Flexural Strength

For prism strength test was conducted at the curing age of 7, 14 and 28 days. The results are shown in Figure 3

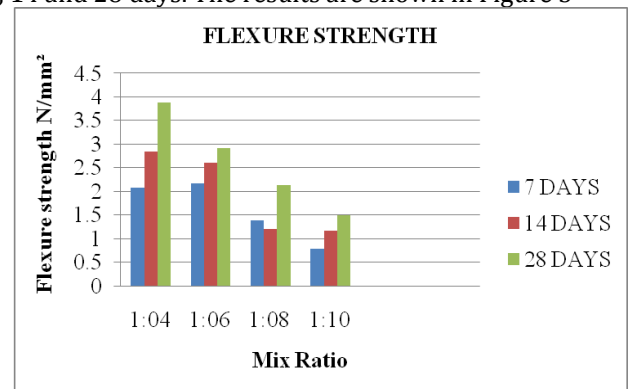


Fig. 3 Flexural strength of pervious concrete

5.3 Split Tensile Strength

For cylinder strength test was conducted at the curing age of 7, 14 and 28 days. The results are shown in figure4.

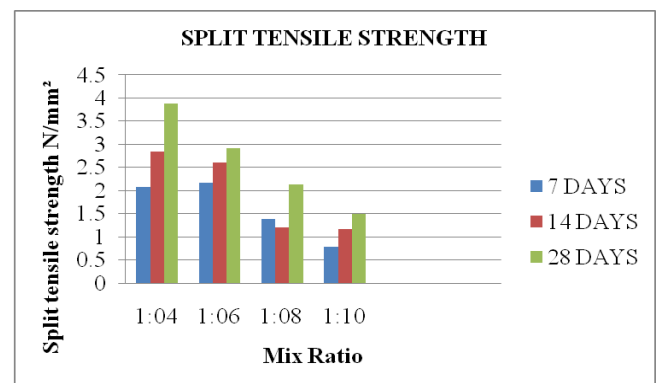


Fig. 4 Split tensile strength of pervious concrete

From the figure shows that 1:4 has the optimum value of compression split tensile and flexural strength. So the mineral admixtures fly ash , GGBS is to be taken as the addition of cement and strength has been found out.

The fly ash is added to the cement as addition of 10%,15%,20%,25%. They are tested and values as shown in figure.

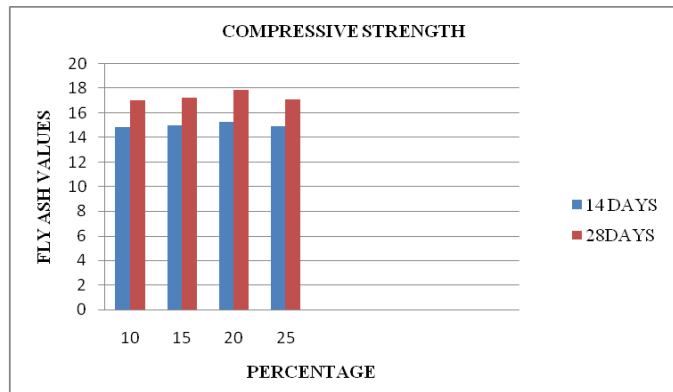


Fig. 5 Compression strength of pervious using fly ash

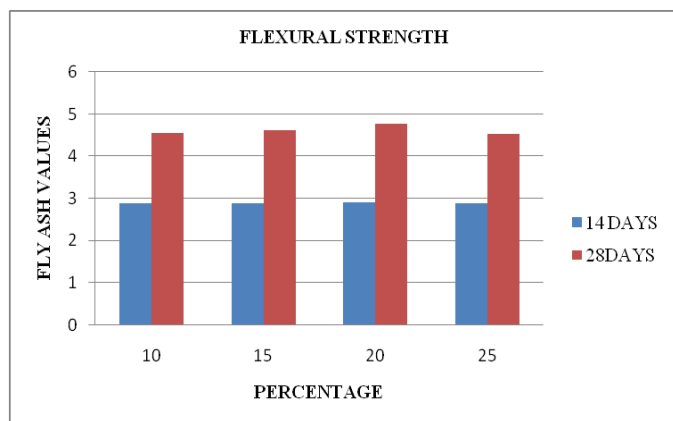


Fig. 6 Flexural strength of pervious using fly ash

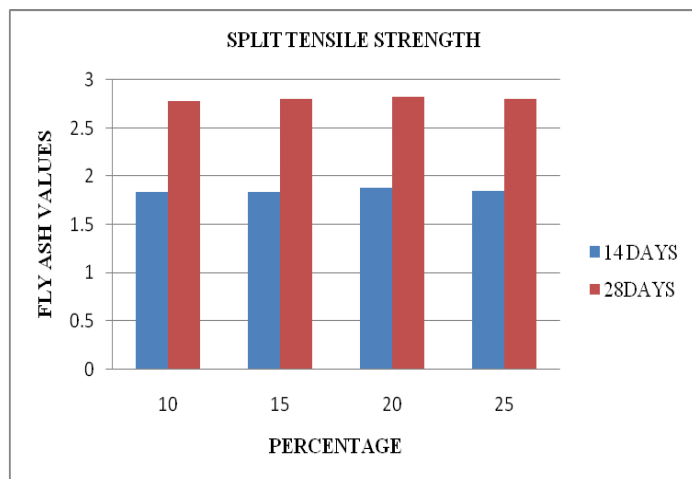


Fig. 7 Split tensile strength of pervious using fly ash

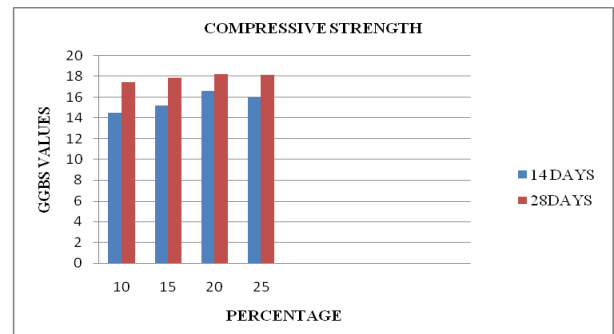


Fig. 8 Compression strength of pervious using GGBS

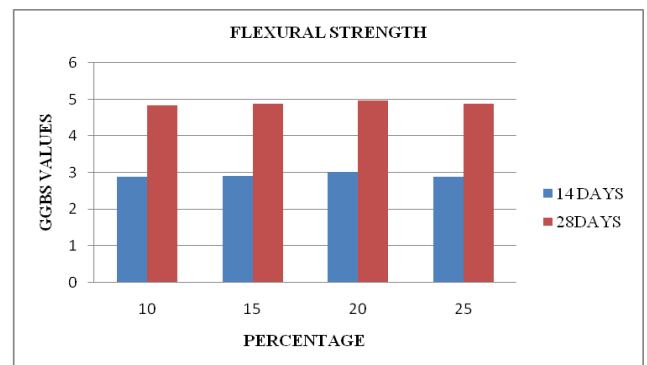


Fig. 9 Flexural strength of pervious using GGBS

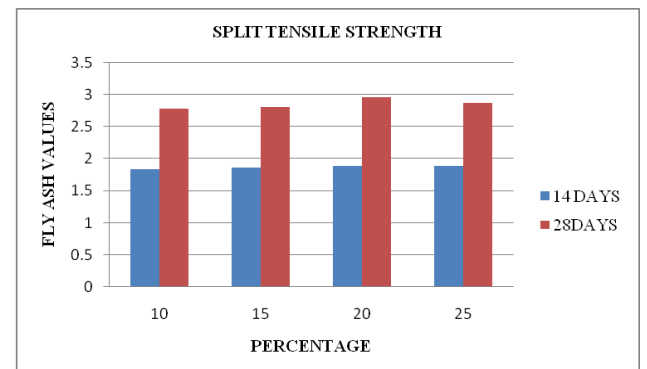


Fig. 10 Split tensile strength of pervious using GGBS

6. CONCLUSION

- From the result, the mix proportions 1:4 gives more compressive It is clearly seen from the experimental result that Pervious Concrete has very low Compressive Strength, Split Tensile Strength as well as Flexural Strength.
- The admixture has to be added to increase the strength of Pervious Concrete in future work.
- In this study the fly ash, GGBS values strength of 20% increases. Then the optimum percentage of fly ash and GGBS are to put together the strength has to be found.

- The flexural behaviour have to be found for the strength of pervious concrete.
- The bond will be reduce in pervious concrete. The reinforcement is given with cement paste to increase the bond and also protect it from rusting for future work.

ACKNOWLEDGEMENT

I should express my sincere thanks to my institution for providing facilities for successful completion of the project. I should thank my department staff and my guide for their constant guidance and valuable suggestions towards the completion of this project. I would express y thanks to the firm and working staff for providing the necessary detail for my project.

REFERENCES

- [1] Abadjieva, T and Sephora, P. (2000). "Investigations on Some Properties of No-Fines Concrete". Department of Civil Engineering UniversitYofBotswana.
- [2] A.H.L. Swaroop, K. Venkateswararao, Prof P Kodandaramarao, "Durability Studies On Concrete With Fly Ash & GGBS" (2013) International Journal of Engineering Research and Applications (IJERA)2248-9622 Vol. 3, Issue 4.
- [3] Deo, O., Sumanasooriya, M. and Neithalath, N. (2010): "Permeability reduction in pervious concrete due to clogging", J.ASCE, 22(7), pp. 741-751.
- [4] Gafoori, N. and Dutta, S. (1995): "Laboratory investigation of compacted no-fine concrete for paving materials", J. Mater. Civ. Eng., 7(3), pp. 183-191.
- [5] Harber, P.J. (2005): "Application of No-fines concrete as a Road Pavement", Rep. Univ., of Southern Queensland, pp. 1-130.
- [6] Hussam A. A. Rehman (2012) "Some Properties of Fiber Reinforced no fine concrete" Al-Qadisiya Journal For Engineering Sciences, Vol. 5, No. 4.
- [7] IS 12727:1999, No-fines cast insitu cement concrete - code of practice. Bureau of Indian Standards, Manak Bhavan, Bahadur Shah Zafar Marg, New Delhi-110 002.
- [8] IS: 2386 - 1963, "Methods for Test of Aggregates for Concrete", Bureau of Indian Standards. New Delhi.
- [9] IS: 383 - 1970, "Specification For Coarse and Fine Aggregate from NATURAL Resources of Concrete", Indian Standard Institute. New Delhi.
- [10] IS: 5816 -1970, "Method of Test for Splitting Tensile Strength of Concrete Cylinder", Bureau Of Indian Standards. New Delhi.
- [11] Joung, Y. and Grasley, Z.C. (2008): "Evaluation and Optimization of Durable pervious concrete for use in urban Areas", Research Rep. SWUTC, pp. 1 -117.
- [12] Mr.V. R. Patil Prof. A. K. Gupta Prof. D. B. Desai (2011) "Use Of Pervious Concrete In Construction Of Pavement For Improving Their Performance" IOSR Journal of Mechanical and Civil Engineering (IOSR-JMCE) ISSN: 2278-1684, PP: 54-56.
- [13] Pavement For Improving Their Performance" IOSR Journal of Mechanical and Civil Engineering (IOSR-JMCE) ISSN: 2278-1684, PP: 54-56.
- [14] Shetty, M.S. (2009) "Concrete technology", Third Edition, S.Chand Publishers, New Delhi .
- [15] Sirile Eathakoti, Navya Gundu,Markandeya Raju Ponnada (2015) "An Innovative No-Fines Concrete Pavement Model" IOSR Journal of Mechanical and Civil Engineering (IOSR-JMCE) e-ISSN: 2278-1684,p-ISSN: 2320-334X, Volume 12, Issue 5 Ver. III PP 34-44.
- [16] Vignesh kumar. R, Vivek kumar. G, Vineet, MS.F.S.Freida (2016) "An Experimental Study on properties of Pervious Concrete" International Journal of Advances in Engineering Research (IJAER) , Vol. No. 11, Issue No. III.
- [17] Vinayak Awasare, Prof. M. V. Nagendra (2014) "Analysis of Strength Characteristics of GGBS Concrete" International Journal of Advanced Engineering Technology E-ISSN 0976-3945.
- [18] Wanielista, M., Chopra, M. (2007): "Performance assessment of Portland cement pervious concrete", Rep. Prepared for Storm water Management Academy, Univ.of Central Florida, Orlando, Fla, pp. 1-125.