

# SMART SURVEILLANCE SYSTEM USING LBPH ALGORITHM

Siva ramu<sup>1</sup>, Surya<sup>2</sup>, Vikraman<sup>3</sup>, Sivasakthi<sup>4</sup>

<sup>1</sup>N.Siva ramu, Dept. of Information Technology, AAMEC, Tamilnadu, India

<sup>2</sup>M.Surya, Dept. of Information Technology, AAMEC, Tamilnadu, India

<sup>3</sup>R.Vikraman, Dept. of Information Technology, AAMEC, Tamilnadu, India

<sup>4</sup>Mrs.V.Sivasakthi, Asst. Prof., Dept. of Information Technology, AAMEC, Tamilnadu, India

\*\*\*

**Abstract** - Safety, and security are major concerns in the modern day. People and organizations can employ security mechanisms to safeguard their property be it home or company. Present security systems involve the utilization of assorted sensors for cameras for video surveillance. This project aims at providing one such idea to make sure the protection and security of one's property. this technique performs face recognition as an authentication procedure when an unknown face is detected by a snapshot of the unknown face. during this paper, we propose to supply a sensible CCTV closed-circuit television with intrusion detection using the LBPH algorithm and structural similarity index measure. By the utilization of intrusion detection, CCTV cameras not only record the real-time videos and also process the video at the time of recording to search out the unwanted persons arriving within our surveillance area.

**Key Words:** Computer vision, authentication, intrusion detection, LBPH, SSIM, surveillance area.

## 1. INTRODUCTION

The development of technology associated with the processing using a computer is already growing rapidly, whereas image processing is using digital technology. As technology advances, graphic images are fully utilized to market the welfare of mankind. together with the event of creativity, the image cannot be separated from digital image processing. Most of the CCTV footage is employed for buffering purposes. If any issues/events occur CCTV Footage is used to determine the criminal. CCTVs will only capture the events/incidents but don't seem to be capable of recognizing a criminal. Now almost altogether places, CCTVs are used. they're only used for capturing live video occurring under its premises. In most cases, an individual is deployed to watch the video streaming. And in another case, video captured by CCTVs is recorded and it'll be checked given that any incident had occurred.

### 1.1 Benefits of Video Surveillance

There was a time when surveillance techniques were utilized only in shopping centers and malls. Nowadays, you can notice the electric circuit televisions in almost any place you visit, from tiny low stores to homes and holy places. As a

result, they guarantee greater security at fraction of the price.

### Why Smart Surveillance?

In our busy lives, we do not have much time to observe and to stay a watch on everything. From every family, most of the members are working, or maybe in malls and hospitals so observing each and each space isn't possible. It's the 21st century and we must think smartly to form our life better, easier, and more secure, so rather than sitting without delay place for an extended why not carry the protection in our pocket.

## 2 .ALGORITHM USED

### 2.1 LBPH (Local Binary Pattern Histogram)

LBPH may be a face recognition algorithm it's accustomed recognize the face of someone. it's known for its performance and the way it can recognize the face of someone from both the front face and side face. Before starting the intuition behind the LBPH algorithm, let's first understand a touch bit about the fundamentals of Images and pixels to grasp how images are represented before we start the content about face recognition. So let's start understanding images and pixels.

### 2.2 Structural Similarity

It is an apperception-based model that considers image degradation as a perceived change in structural information, while also incorporating important perceptual phenomena, including both luminance masking and contrast masking. The difference with other techniques like MSE is that these approaches estimate absolute errors. It is the thought that the pixels have strong interdependencies especially after they are close. These dependencies carry important information about the structure of objects within the display. Luminance masking could be a phenomenon whereby an may be less visible in bright regions, while contrast masking could be a phenomenon whereby distortions lessen visibility where there's a major activity.

### 3 . LITERATURE SURVEY

#### 3.1 Hybrid algorithm for multi people counting and tracking for smart surveillance, Mahwish Pervaiz, Ahmad Jalal, Kibum Kim,2021.

In people verification, we have applied a hybrid approach of skin detection and body parts detection to intensify the accuracy level and reduce the error rate. During skin detection, the mask of the original image has been created and applied to the object detected to convert them into an RGB image. This RGB image is further converted to the YCbCr domain and pixel values are used to detect skin pixels in each object. For part detection; the head, hands, and feet of each silhouette are extracted, the distance between these parts is identified, and accustomed to verify the object as a human. People counting are implemented using the centroid of each silhouette that's extracted at each frame and moving objects are identified among consecutive frames. In body tracking, centroid and jacquard similarity are accustomed track people's movements between frames.

#### 3.2 Performance Analysis of Object Detection Algorithm for Intelligent Traffic television, Chethan Kumar B, Punitha R, Mohana,2020.

Deep convolutional neural networks (DNNs) are used to detect objects within the regions. In the proposed implementation, the CNN algorithm is used to predict class labels and detect objects Methodology of implementation, consists of data Collection: The chosen dataset is a vehicle detection dataset for urban roads. it is important because the quality and quantity of data will directly determine how well the trained model will behave under various environmental conditions.

#### 3.3 Multi-Person Tracking in Smart television system for Crowd Counting and Normal/Abnormal Events Detection, Ahsan Shehzad, Kibum Kim,2019.

In this paper, we developed a current robust smart television to trace multiple people's overcrowding counting and normal/ abnormal event detection scenarios via a monocular camera. An accurate people detection and verification model is utilized to detect people. These detected people are further processed to come back up with head templates. Template matching using normalized cross-correlation with the assistance of the Jaccard similarity measure is utilized to trace and count the people. Finally, detected people are accustomed generate Gaussian clusters to research the gang for abnormal event detections.

#### 3.4 an internet of Things Based Smart Surveillance and Monitoring System using Arduino, Aditya, Mukul Sharma, Subhash Chand Gupta,2018.

The latest and most effective technology used against robbery and theft is video surveillance and a monitoring system. But the worth of installation and maintenance of these systems becomes impossible for some people to afford. Arduino Mega 2560 could also be a microcontroller board that has the potential to become a camera system when its mini-module called Arducam gets attached thereto. instead of implementing various complex algorithms, a replacement and effective methodology has been developed for motion detection which is to use Pyroelectric infrared (PIR) sensors. Whenever the motion is detected by the PIR sensor, Whenever motion is detected by PIR sensor, it captures the image with the help of an attached Arducam and sends a push message to Android using the Firebase API.

#### 3.5 IoT Based Smart Surveillance Security System using Raspberry Pi, Neha Patil, Shrikant Ambatkar, and Sandeep Kakde,2017.

The purpose of the paper is to define a safekeeping alert device spending little handling power by the Internet of things which assists to observer plus alerts when gestures instead motion are there and then sends images to a cloud server. Besides, internet of things centered use is often used continuously to look at the action further and acquire a warning when gestures as an alternate indication are there. the images are shown straight to a cloud attendant, when the cloud attendant isn't accessible at that time the records are put in storage nearby on a Raspberry Pi. A MasterCard size Raspberry Pi with the advantage of Open Source Computer Vision (Open-CV) software knobs the image processing, control algorithms used for the attentiveness then shows taken images to concerned person email by the utilization of Wi-Fi module. The system uses an ordinary webcam.

### 4. SYSTEM METHODOLOGY


#### 4.1 Structural Similarity Index Metric (SSIM)

Structural Similarity Index Metric (SSIM) for monitoring This feature is employed to seek out what's the thing which is stolen from the frame which is visible to the webcam. This means It constantly monitors the frames and checks which object or thing from the frame has been bumped off by the thief. This uses Structural Similarity to seek out the differences between the two frames. the 2 frames are captured first when noise wasn't happening and second when the noise stopped happening within the frame. SSIM is employed as a metric to live the similarity between two given images. As this system has been around since 2004, lots of fabric exists explaining the idea behind SSIM but only a few resources pass into the main points, that too

specifically for a gradient-based implementation as SSIM is commonly used as a loss function.

SSIM extracts 3 key features from an image:

- Luminance
- Contrast
- Structure

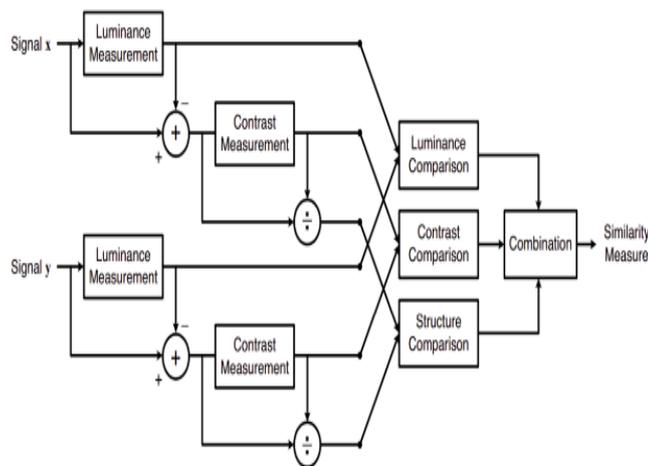

The comparison between the 2 images is performed on the premise of those 3 features. This system calculates the Structural Similarity Index between 2 given images which could be a value between -1 and +1. a worth of +1 indicates that the two given images are very similar or identical while the worth of -1 indicates the two given images are very different. Often these values are adjusted to be within the range [0, 1], where the extremes hold the identical meaning.

**Luminance:** It is measured by averaging over all the pixel values.

$$\mu_x = \frac{1}{N} \sum_{i=1}^N x_i.$$

Its denoted by  $\mu$  (Mu) and also the formula is given below.

$$\sigma_x = \left( \frac{1}{N-1} \sum_{i=1}^N (x_i - \mu_x)^2 \right)^{\frac{1}{2}}.$$


**Structure:** The structural comparison is completed by employing a consolidated formula (more thereon later) but in essence, we divide the signaling with its variance so that the result has unit variance which allows for a more robust comparison.

$$\frac{(x - \mu_x)}{\sigma_x}$$

Luckily, due to the image package in python, we shouldn't replicate all these mathematical calculations in python since the image has pre-built a feature that does all of those tasks for us by just calling its in-built function. We just must enclose two images/frames which we've captured earlier, so we just feed them in and it gives us out the masked image with the score.

### 4.2 Detecting faces in the frames

This is done through Haarcascade classifiers which are again built-in in the OpenCV module of python.

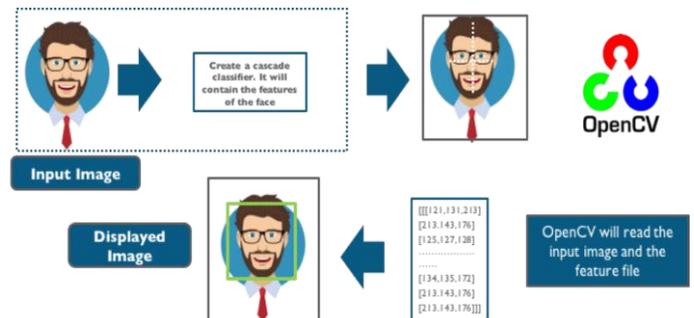

Cascade classifier working with haar-like features, is a special case ensemble learning called boosting. It typically relies on Adaboost classifiers Cascade classifiers are trained on a few hundred sample images that contain the object we want to detect and other images that do not contain those images.

There are some common features :

- a dark eye area compared to upper cheeks.
- a bright nose bridge region compared to the eyes.
- some specific locations of the eyes, mouth, and nose.

The feature extraction process will look like this feature are similar to this convolution kernel which is used to detect the presence of the feature in the given image. For doing all the stuff in the OpenCV module in python language has a built-in function called cascade classifier which we have used to detect faces in this frame.

### 4.3 Detect Noises in the frame

This feature is used to find the noises in the frames well this is something you would find in most of the CCTVs but in this module, we'll see how it works. Talking in a simple way all the frames are continuously analyzed and checked for noises. Noise checked in the consecutive frames. We simply make a complete distinction between two frames, in this way the distinction between the two images is analyzed, and the edges (boundaries of motion are determined) and if there are no boundaries then no motion, and if there are any there is motion.

frame1	frame2	frame2 - frame1	abs (frame2 - frame1)
10 90 16 16	10 90 16 16	0 0 0 0	0 0 0 0
0 11 11 11	0 13 17 11	0 2 6 0	0 2 6 0
18 30 33 33	18 34 31 33	0 4 -2 0	0 4 2 0
18 18 18 18	18 17 19 18	0 -1 1 0	0 1 1 0

As you would know all images are just integer/ float values of pixels which tell the brightness of pixel and similarly every pixel has values of brightness.



So we are simply making a complete difference because the negative makes no sense.

### 4.4 Local Binary Pattern Histogram (LBPH)

So now we've detected faces within the frame and this can be the time to spot them and check if it's within the dataset which was accustomed to training our LBPH model.

The LBPH uses 4 parameters:

**Radius:** the radius is employed to make the circular local binary pattern and represents the radius around the central pixel. it's usually set to 1.

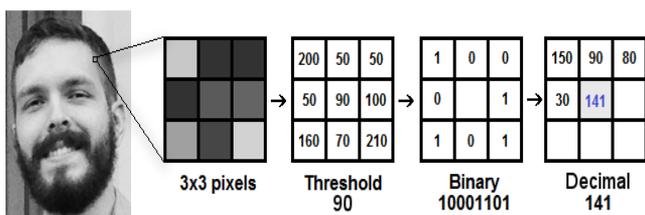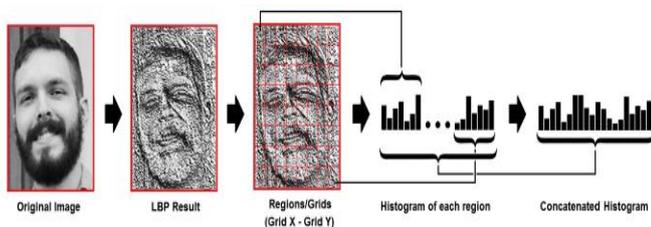

**Neighbors:** the number of sample points to make the circular local binary pattern. detain mind: the more sample points you include, the upper the computational cost. it's usually set to eight.

**Grid X:** the number of cells within the horizontal direction. The more cells, the finer the grid, the upper the dimensionality of the resulting feature vector. it's usually set to eight.

**Grid Y:** the number of cells within the vertical direction. The more cells, the finer the grid, and the upper the dimensionality of the resulting feature vector. It is usually set to eight. The first step in calculating LBPH is to create an intermediate image that best describes the initial image, by highlighting the facial characteristics. To do so, the algorithm uses an idea of a window, supported by the parameters radius and neighbors. This is shown perfectly via the above image.

**Extracting the Histograms:** Now, using the image generated within the last step, we can use the Grid X and Grid Y parameters to divide the image into multiple grids. And on balance, the model is trained, and later on, when we would like to create predictions the identical steps are applied to the make, and its histograms are compared with the already trained model in such a way this feature works.

## 5. CONCLUSIONS

In the end, we conclude that each person wants to be in an exceedingly better and secure world, this paper has covered the advantages and downsides of each paper that has been published to this point. To produce better security and safety new system was implemented using LBPH and SSIM and also which are cost-effective and form better further research goes on. Below are future workouts on this project, like [1]Creating Portable CCTV [2]Adding in-built night vision capability [3]Deadly weapon detection [4]Accident detection [5]Fire Detection.

## REFERENCES

- [1] A hybrid algorithm for multi people counting and tracking for smart surveillance, Mahwish Pervaiz, Ahmad Jalal, Kibum Kim,2021.
- [2] Performance Analysis of Object Detection Algorithm for Intelligent Traffic Surveillance System, Chethan Kumar B, Punitha R, Mohana,2020.
- [3] Multi-Person Tracking in Smart Surveillance System for Crowd Counting and Normal/Abnormal Events Detection, Ahsan Shehzad, Kibum Kim,2019.

- [4] Multi-Person Tracking in Smart Surveillance System for Crowd Counting and Normal/Abnormal Events Detection, Ahsan Shehzad, Kibum Kim,2019.
- [5] IoT Based Smart Surveillance Security System using Raspberry Pi, N Neha Patil, Shrikant Ambatkar and Sandeep Kakde,2017.
- [6] Smart Video Security Surveillance with Mobile Remote Control by Tasleem Mandrupkar Manisha Kumari Rupali Mane(2014).
- [7] Video Monitoring and Motion Detection System based on arm-Linux platform and HTTP protocol with SMS capability Nava Jeevan Raju, O. and Praveen, P.(2014).

### **BIOGRAPHIES**



Siva ramu N  
B.Tech Information Technology  
Anjalai Ammal Mahalingam  
Engineering College,Tamil nadu  
India.



Surya M  
B.Tech Information Technology  
Anjalai Ammal Mahalingam  
Engineering College,Tamil nadu  
India.